




Vista dal basso
View from below
Vue du dessous
Ansicht von unten
Vista desde abajo
вид снизу




Per tutti i modelli Book, in qualsiasi finitura, il sottoaleta è RAL 7021
Book is available for all the finish with "folder corner" in RAL 7021
Book en toutes finitions est disponible avec "coin plie" en RAL 7021
Für alle Book Modelle, in jeder Farbe, ist die Oberfläche unter dem Knick RAL 7021
Para todos los modelos „Book“, en todos los acabados, la aleta de abajo es en RAL 7021
Book доступен во всех цветах с отворотом угла в цвете RAL 7021

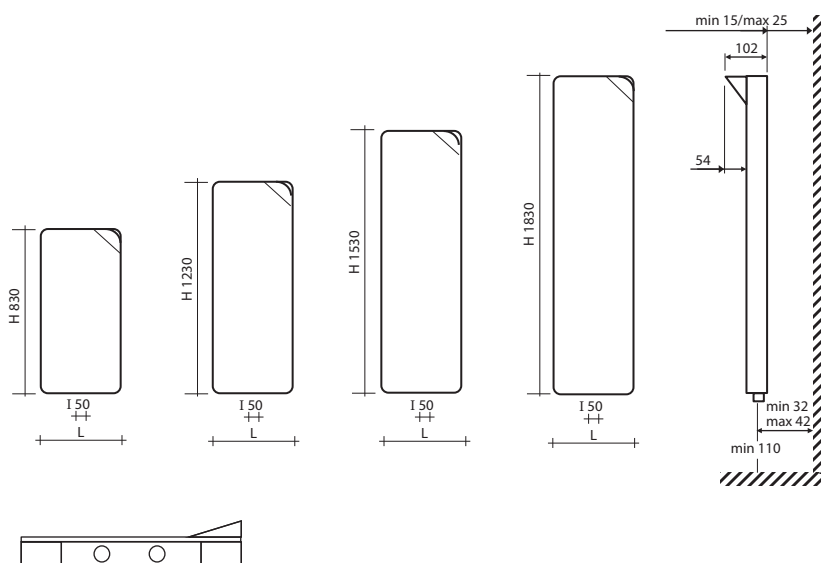

p./S. 393 ALLACCIAMENTI IDRAULICI **SPECIALI** / **SPECIAL CONNECTIONS** /
p./S. 395 BRANCHEMENTS **SPECIALS POSSIBLES** /
HYDRAULISCHE **SONDERANSCHLÜSSE** / EMPALMES HYDRAULICOS
ESPECIALES / **СПЕЦИАЛЬНЫЕ СОЕДИНЕНИЯ**

L 375 mm = INT. max 150 mm min 50 mm
L 520 mm = INT. max 250 mm min 50 mm



Allacciamenti dal basso **a richiesta**.
Bottom connection **on request**.
Branchement par dessous **sur demande**.

Anschluss von unten **optional**.
Conexión por abajo **bajo pedido**.
Гидравлическое соединение снизу выполняется **по запросу**

$$\text{Watt} = \text{Kcal/h} \div 0,860$$

$$\text{Kcal/h} = \text{Watt} \times 0,860$$

codice code code Artikel Nr. codigo код	altezza height hauteur Höhe altura высота	larghezza width largeur Breite ancho ширина	interasse distance between bars entraxe Achsabstand distancia entre centros межцентровое расстояние	peso weight poids Gewicht peso вес	output - verniciato output - painted output - peint Output - lackiert output - pintado мощность - окрашенный			COLOURS p./S. 430			
								bianco puro opaco pure white matt blanc pur mat mattes reines Weiß blanco puro mate чистый белый матовый RAL 9016	gruppo group groupe Gruppe grupo группа A	gruppo group groupe Gruppe grupo группа B	gruppo group groupe Gruppe grupo группа C
	H mm	L mm	I mm	Kg	75/65-20 watt ★ Δt50	55/45-20 watt ★ Δt30	55/45-24 watt ★ Δt26	...SV	..SVC	...SVM	...SVS
FBOOK08500...	830	520	50	22	328	168	142				
FBOOK12400...	1230	375	50	24	308	156	133				
FBOOK12500...	1230	520	50	31	468	239	202				
FBOOK15400...	1530	375	50	29	385	197	166				
FBOOK15500...	1530	520	50	39	559	286	241				
FBOOK18400...	1830	375	50	34	433	222	187				
FBOOK18500...	1830	520	50	45	662	338	285				

Materiale: acciaio al carbonio
Pressione di esercizio: 4 bar

Material: carbon-steel
Working pressure: 4 bar


Matériel: Acier
Pression d'exercice: 4 bars

Material: Kohlenstoffstahl
Betriebsdruck: 4 bar

Material: Acero de carbono
Presión de trabajo: 4 bar


Материал – углеродистая сталь
Рабочее давление – 4 бар

- ★ I watt hanno valori provvisori in attesa di certificazione
 ★ The watt values are not definitive awaiting for provisoire dans l'attente de la certification
 ★ Die Wattwerte sind vorläufig bis zur Zertifizierung.
 ★ Los Vattios tienen valores provisionales en espera de la certificación
 ★ До получения сертификата приводится предварительное значение мощности в ваттах.

					
cod. 10101934...	cod. 10107834...	cod. C409...	cod. 10102034...	cod. 101095...	cod. 101094...
p./S. 402	p./S. 404	p./S. 402	p./S. 403	p./S. 403	p./S. 409

! Raccordi disponibili - Fittings available - Raccords disponibles - Klemmverschraubungen verfügbar - Racores disponibles - Фитинги доступны к заказу - p./S. 408

 Disponibilità valvole colorate . Coloured valves available . Vannes colorées disponibles . Farbige Ventile verfügbar .
 Disponibilidad de válvulas de colores . Возможны окрашенные клапана
 p./S.431



Disponibile anche nella **versione mista**. Per informazioni consultare il ns ufficio tecnico tel. 0039 030 2530054.
 Available also in **dual energy version**. For information please contact our technical staff 0039 030 2530054.
 Disponible aussi en **version mixte**. Consulter notre bureau technique 0039 030 2530054.
 Auch in der **gemischter Ausführung** lieferbar. Bitte kontaktieren Sie unsere technische Abteilung Tel.: 0039 030 2530054.
 Disponible también en **version mixta**. Por información consulte con el departamento técnico 0039 030 2530054.
 имеется в **смешанном варианте**. За дополнительной информацией обращаться в технический отдел 0039 030 2530054.