


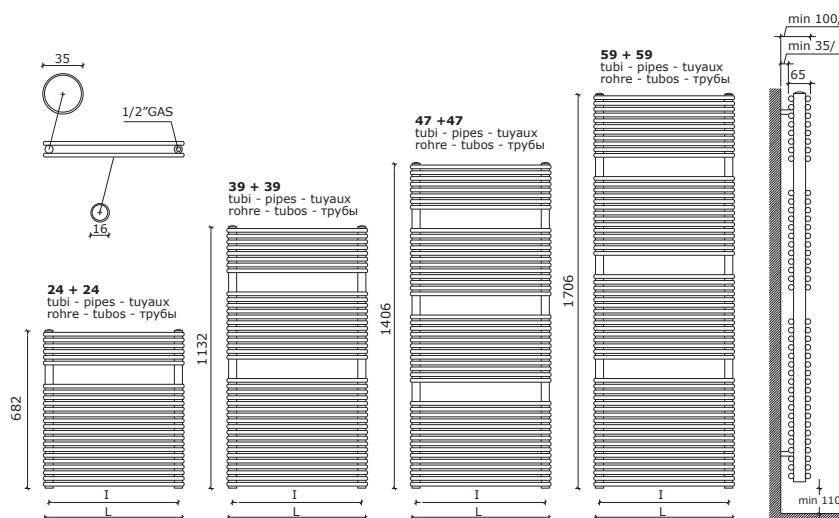

Interasse dal centro foro al muro min. 67 / max 77 mm.

Distance between hole center and wall min. 67 / max 77 mm.

Distance du centre du trou au mur min. 67 / max 77 mm.

Abstand zwischen Lochmitte und Wand min. 67 / max 77 mm.

Distancia entre el centro del agujero y el muro min. 67 / max 77 mm.

Расстояние между центром отверстия и стеной – не менее 67 мм и не более 77 мм.

A

Centrale, Central,
Centrale, Mittel,
Centrale, центральный

Interasse 50 mm **a richiesta**.

Central distance 50 mm **on request**.


Entraxe 50 mm **sur demande**.

Mittelanschluss 50 mm **optional**.


Distancia entre centros de 50 mm, **bajo pedido**.

По запросу радиатор может выполняться с центральным межосевым расстоянием, равным 50 мм.

p./S. 393



F



Allacciamento laterale destro oppure sinistro **a richiesta**, ideale per sostituire un vecchio radiatore.

Lateral connection **on request**, ideal when replacing an old radiator.

Raccordement latéral **sur demande**, idéal pour remplacer un radiateur précédent.

Seitlicher Anschluss **optional**, ideal zum Austauschen eines alten Heizkörpers.

Conexión lateral **bajo pedido**, ideal para reemplazar un radiador antiguo.

Подключение боковое правое или левое **под заказ**, идеально для замены старого радиатора

p./S. 395

Watt = Kcal/h ÷ 0,860
Kcal/h = Watt × 0,860

COLOURS p./S. 430

codice code code Artikel Nr. codigo код	altezza height hauteur Höhe altura высота	larghezza width largeur Breite ancho ширина	interasse distance between bars entraxe Achsabstand distancia entre centros межцентровое расстояние	output - verniciato output - painted output - peint Output - lackiert output - pintado мощность - окрашенный			bianco white blanc Weiß blanco белый RAL 9010	gruppo group groupe Gruppe grupo группа A	gruppo group groupe Gruppe grupo группа B	gruppo group groupe Gruppe grupo группа C
	H mm	L mm	I mm	75/65-20 watt★ Δt50	55/45-20 watt★ Δt30	55/45-24 watt★ Δt26		...C	...M	...S
410632...	682	410	360	587	300	253				
510632...	682	510	460	712	378	316				
610632...	682	610	560	756	401	336				
760632...	682	760	710	850	458	385				
411132...	1132	410	360	877	448	378				
511132...	1132	510	460	1061	560	469				
611132...	1132	610	560	1245	723	605				
761132...	1132	760	710	1484	788	660				
411432...	1406	410	360	1144	584	492				
511432...	1406	510	460	1362	712	594				
611432...	1406	610	560	1553	816	681				
761432...	1406	760	710	1770	939	787				
411732...	1706	410	360	1334	681	574				
511732...	1706	510	460	1638	843	700				
611732...	1706	610	560	1952	1020	851				
761732...	1706	760	710	2268	1210	1015				

Materiale:
acciaio al carbonio

Pressione di esercizio: 8 bar

Material:
carbon-steel

Working pressure: 8 bar

Matériel:
Acier

Pression d'exercice: 8 bars

Material:
Kohlenstoffstahl

Betriebsdruck: 8 bar

Material:
Acero de carbono

Presión de trabajo: 8 bar

Материал –
углеродистая сталь

Рабочее давление – 8 бар

★ I watt hanno valori provvisori in attesa di certificazione. ★ The watt values are not definitive awaiting for certification.

★ Le nombre de Watts est une valeur indiquée à titre provisoire dans l'attente de la certification. ★ Die Wattwerte sind vorläufig bis zur Zertifizierung.

★ Los Vattios tienen valores provisionales en espera de la certificación. ★ До получения сертификата приводится предварительное значение мощности в ваттах.

❗ La versione cromata NON è disponibile.

❗ Chromed radiators NOT available.

❗ La version chromée N'EST PAS disponible

❗ Die verchromte Version ist NICHT verfügbar.

❗ La versión cromada NO está disponible.

❗ Хромированная версия в продаже ОТСУТСТВУЕТ.

					
cod. 10101934...	cod. 10107834...	cod. C409...	cod. 10102034...	cod. 101095...	cod. 101094...
p./S. 402	p./S. 404	p./S. 402	p./S. 403	p./S. 403	p./S. 409

❗ Raccordi disponibili - Fittings available - Raccords disponibles - Klemmverschraubungen verfügbar - Racores disponibles - Фитинги доступны к заказу - p./S. 408

 Disponibilità valvole colorate . Coloured valves available . Vannes colorées disponibles . Farbige Ventile verfügbar . Disponibilidad de válvulas de colores . Возможны окрашенные клапана

p./S.431