




GABBIANO DOUBLE

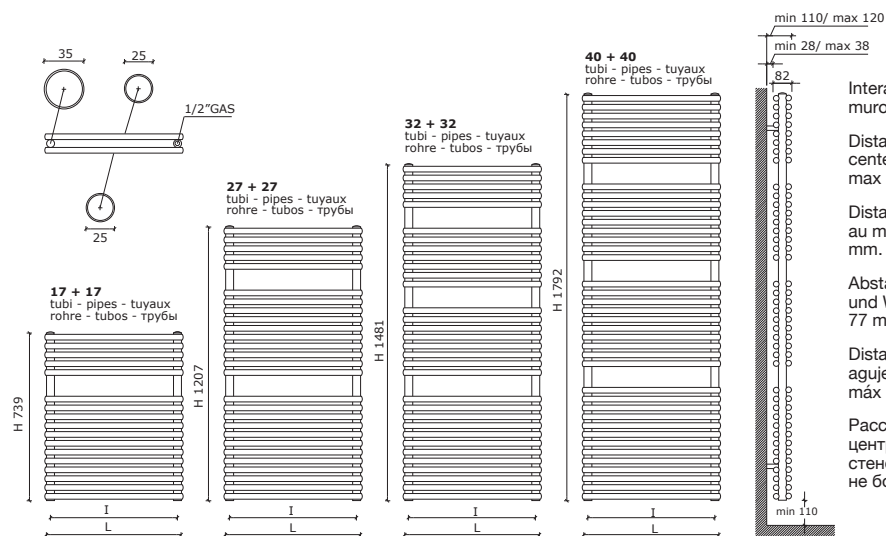

Interasse dal centro foro al muro min. 67 / max 77 mm.

Distance between hole center and wall min. 67 / max 77 mm.

Distance du centre du trou au mur min. 67 / max 77 mm.

Abstand zwischen Lochmitte und Wand min. 67 / max 77 mm.

Distancia entre el centro del agujero y el muro min. 67 / max 77 mm.


Расстояние между центром отверстия и стеной – не менее 67 мм и не более 77 мм.

A
Centrale, Central,
Centrale, Mittel,
Centrale, центральный


Interasse 50 mm **a richiesta**.
Central distance 50 mm **on request**.
Entraxe 50 mm **sur demande**.
Mittelanschluss 50 mm **optional**.
Distancia entre centros de 50 mm, **bajo pedido**.

По запросу радиатор может выполняться с центральным межосевым расстоянием, равным 50 мм.

p./S. 393



F



Allacciamento laterale destro oppure sinistro **a richiesta**, ideale per sostituire un vecchio radiatore.

Lateral connection **on request**, ideal when replacing an old radiator.

Raccordement latéral **sur demande**, idéal pour remplacer un radiateur précédent.

Seitlicher Anschluss **optional**, ideal zum Austauschen eines alten Heizkörpers.

Conexión lateral **bajo pedido**, ideal para reemplazar un radiador antiguo.

Подключение боковое правое или левое **под заказ**, идеально для замены старого радиатора

p./S. 395

$$\text{Watt} = \text{Kcal/h} \div 0,860$$

$$\text{Kcal/h} = \text{Watt} \times 0,860$$

COLOURS p./S. 430

codice code code Artikel Nr. codigo код	altezza height hauteur Höhe altura высота	larghezza width largeur Breite ancha ширина	interasse distance between bars entraxe Achsabstand distancia entre centros межцентровое расстояние	output - verniciato output - painted output - peint Output - lackiert output - pintado мощность - окрашенный			bianco white blanc Weiß blanco белый RAL 9010	gruppo group groupe Gruppe grupo группа A	gruppo group groupe Gruppe grupo группа B	gruppo group groupe Gruppe grupo группа C
	H mm	L mm	I mm	75/65-20 watt★ Δt50	55/45-20 watt★ Δt30	55/45-24 watt★ Δt26		...C	...M	...S
410751...	739	410	360	621	317	268				
510751...	739	510	460	692	373	314				
610751...	739	610	560	763	411	346				
760751...	739	760	710	890	480	403				
411251...	1207	410	360	642	328	277				
511251...	1207	510	460	986	521	435				
611251...	1207	610	560	1330	706	591				
761251...	1207	760	710	1513	820	690				
411451...	1481	410	360	1076	549	463				
511451...	1481	510	460	1301	691	578				
611451...	1481	610	560	1526	818	687				
761451...	1481	760	710	1780	964	812				
411751...	1792	410	360	1310	669	564				
511751...	1792	510	460	1636	868	727				
611751...	1792	610	560	1962	1052	884				
761751...	1792	760	710	2290	1241	1045				

Materiale:
acciaio al carbonio
Pressione di esercizio: 8 bar

Material:
carbon-steel
Working pressure: 8 bar

Matériel:
Acier
Pression d'exercice: 8 bars

Material:
Kohlenstoffstahl
Betriebsdruck: 8 bar

Material:
Acero de carbono
Presión de trabajo: 8 bar

Материал –
углеродистая сталь
Рабочее давление – 8 бар

★I watt hanno valori provvisori in attesa di certificazione. ★The watt values are not definitive awaiting for certification.

★Le nombre de Watts est une valeur indiquée à titre provisoire dans l'attente de la certification. ★Die Wattwerte sind vorläufig bis zur Zertifizierung.

★Los Vattios tienen valores provisionales en espera de la certificación. ★До получения сертификата приводится предварительное значение мощности в ваттах.

❗ La versione cromata NON è disponibile.


❗ Chromed radiators NOT available.

❗ La version chromée N'EST PAS disponible

❗ Die verchromte Version ist NICHT verfügbar.

❗ La versión cromada NO está disponible.

❗ Хромированная версия в продаже ОТСУТСТВУЕТ.

					
cod. 10101934...	cod. 10107834...	cod. C409...	cod. 10102034...	cod. 101095...	cod. 101094...
p./S. 402	p./S. 404	p./S. 402	p./S. 403	p./S. 403	p./S. 409

❗ Raccordi disponibili - Fittings available - Raccords disponibles - Klemmverschraubungen verfügbar - Racores disponibles - Фитинги доступны к заказу- p./S. 408

 Disponibilità valvole colorate . Coloured valves available . Vannes colorées disponibles . Farbige Ventile verfügbar .
Disponibilidad de válvulas de colores . Возможны окрашенные клапана
p./S.431