




STILUS WALL

design by Giuseppe Bavuso



PaletteCAD

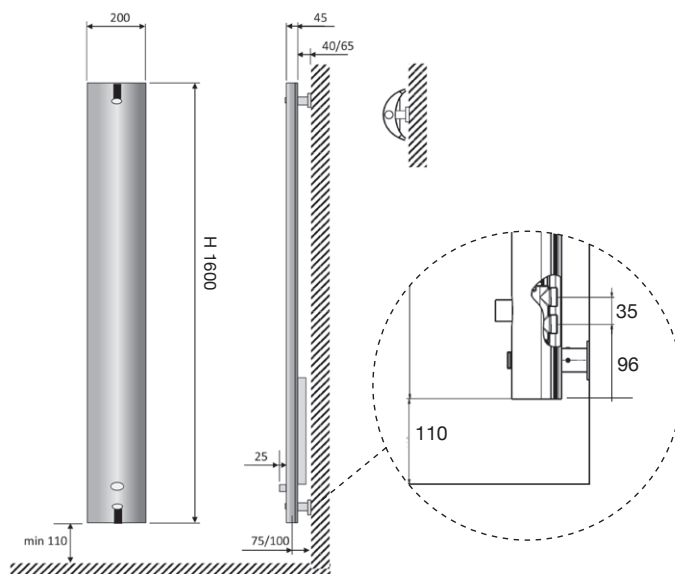

Allacciamento idraulico **verticale**
con interasse 35 mm

Vertical hydraulic connection with
distance between pipes 35 mm

Connexion hydraulique **vertical**
avec entraxe 35 mm

Standardanschluss **seitlich** mit
Achsabstand 35 mm

Conexión hidráulica **vertical** con
distancia entre centros de 35 mm.

Вертикальное гидравлическое
соединение с расстоянием между
трубами 35 мм

$$\text{Watt} = \text{Kcal/h} \div 0,860$$
$$\text{Kcal/h} = \text{Watt} \times 0,860$$

codice code code Artikel Nr. codigo код	altezza height hauteur Höhe altura высота	larghezza width largeur Breite ancha ширина	interasse distance between bars entraxe Achsabstand distancia entre centros межцентровое расстояние	output - verniciato output - painted output - peint Output - lackiert output - pintado мощность - окрашенный	COLOURS p./S. 430				SPECIAL FINISHES
					bianco puro opaco pure white matt blanc pur mat mattes reines Weiß blanco puro mate чистый белый матовый	gruppo group groupe Gruppe grupo группа	gruppo group groupe Gruppe grupo группа	gruppo group groupe Gruppe grupo группа	
	H mm	L mm	I mm	75/65-20 watt ★ Δt50	RAL 9016	A	B	C	...BI = biotite ...DB = dark bronze ...TI = titanio ...PA = palladio ...PL = platino ...AM = ambra
FSTIW1600...	1600	200	35	350		...C	...M	...S	

Materiale: Alluminio

Pressione di esercizio: 8 bar

Material: aluminium

Working pressure: 8 bar

Matériel: aluminium

Pression d'exercice: 8 bars

Material: Aluminium

Betriebsdruck: 8 bar

Material: Aluminio

Presión de trabajo: 8 bar

Материал - алюминий


Рабочее давление - 8 бар

★ I watt hanno valori provvisori in attesa di certificazione. ★ The watt values are not definitive awaiting for certification.

★ Le nombre de Watts est une valeur indiquée à titre provisoire dans l'attente de la certification. ★ Die Wattwerte sind vorläufig bis zur Zertifizierung.

★ Los Varios tienen valores provisionales en espera de la certificación. ★ До получения сертификата приводится предварительное значение мощности в ваттах.

FINITURE SPECIALI . SPECIAL FINISHES . FINITIONS SPECIALES - OBERFLÄCHENFARBEN -
ACABADOS ESPECIALES . СПЕЦИАЛЬНАЯ ОТДЕЛКА



biotite



dark bronze



titanio




palladio



platino



ambra



Appendiabito in acciaio inox satinato
Satin stainless steel clothes hook
Patère en acier inox satiné
Kleiderhalter aus satiniertem Edelstahl
Pomo colgador de acero inoxidable satinado
Вешалка из сатинированной
нержавеющей стали

cod. 10101



ALLACCIAMENTO IDRAULICO **VERTICALE** - VERTICAL HYDRAULIC
CONNECTION - CONNEXION HYDRAULIQUE VERTICAL
STANDARDANSCHLUSS **SEITLICH** - CONEXIÓN HIDRÁULICA **VERTICAL** -
ВЕРТИКАЛЬНОЕ ГИДРАВЛИЧЕСКОЕ СОЕДИНЕНИЕ



Valvola Monotubo
i = 35mm

Valvola monotubo cromo satinata di serie

Standard satin chrome single-pipe valve

Vanne monotube chrome satinée de série

Serienmäßiges Einrohrventil aus satiniertem Chrom

Válvula monotubo cromo satinada de serie

Клапан для 1-трубной системы матовый хром в

стандартной комплектации

! Raccordi per valvole 24 x 19 . Fittings for valves 24 x 19 . Raccords pour vannes 24 x 19 .
Klemmverschraubungen verfügbar 24 x 19 , racores para válvulas 24 x 19 . Муфты 24 x 19

p./S. 408



STILUS WALL LED



A richiesta: Kit LED con scheda e due barre Led 24 volt +
telecomando

On request: LED kit with circuit board and two LED lights 24 volt
+ remote control

Sur demande: Kit LED avec un circuit imprimé et deux lumières
LED 24 volts + télécommande

optional: Kit LED mit Leiterplatte und zwei LED-Leuchten 24 Volt
+ Fernbedienung

Bajo pedido: Kit LED con placa de circuito y dos luces LED de 24
voltios + control remoto

По запросу: Комплект светодиодов с монтажной платой и
двумя светодиодами 24 вольт + пультом

cod. 10100