

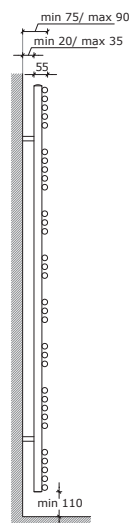
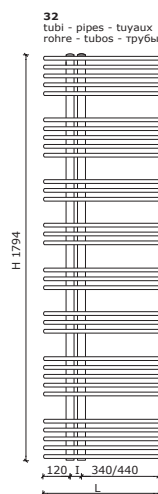
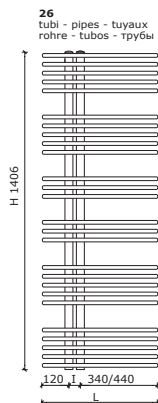
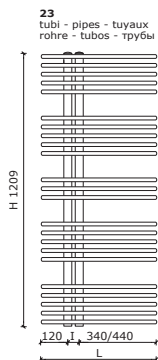





PAVONE 20 CHROME

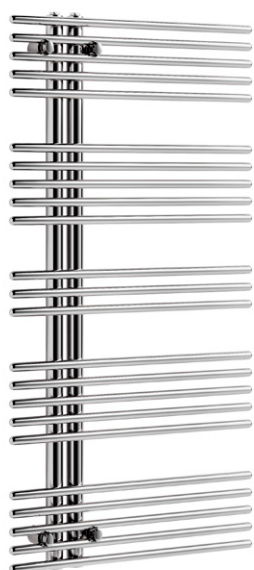

Interasse dal centro foro al muro min. 38 / max 53 mm.


Distance between hole center and wall min. 38 / max 53 mm.

Distance du centre du trou au mur min. 38 / max 53 mm.

Abstand zwischen Lochmitte und Wand min. 38 / max 53 mm.

Distancia entre el centro del agujero y el muro min. 38 / max 53 mm.

Расстояние между центром отверстия и стеной – не менее 38 мм и не более 53 мм.

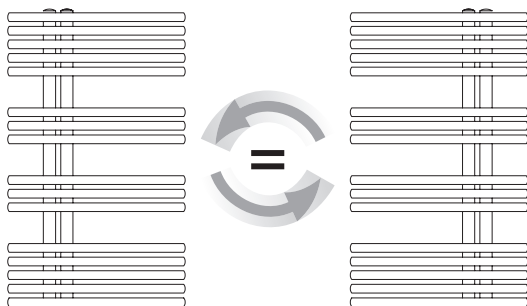

$$\text{Watt} = \text{Kcal/h} \div 0,860$$

$$\text{Kcal/h} = \text{Watt} \times 0,860$$

codice code code Artikel Nr. codigo код	altezza height hauteur Höhe altura высота	larghezza width largeur Breite Breite ancho ширина	interasse distance between bars entraxe Achsabstand distancia entre centros межцентровое расстояние	output output output Output Output output мощность			cromato chromed chrome verchromt cromado хромированный
	H mm	L mm	I mm	75/65-20 watt★ Δt50	55/45-20 watt★ Δt30	55/45-24 watt★ Δt26	
855150CR	858	510	50	295	151	127	
856150CR	858	610	50	360	184	155	
125150CR	1209	510	50	429	219	185	
126150CR	1209	610	50	517	264	223	
145150CR	1406	510	50	483	247	208	
146150CR	1406	610	50	585	299	252	
175150CR	1794	510	50	607	310	262	
176150CR	1794	610	50	721	368	311	

Materiale:
acciaio al carbonio
Pressione di esercizio:
8 bar

Material:
carbon-steel
Working pressure: 8 bar

Matériel:
Acier
Pression d'exercice: 8 bars

Material:
Kohlenstoffstahl
Betriebsdruck: 8 bar

Material:
Acero de carbono
Presión de trabajo: 8 bar

Материал –
углеродистая сталь
Рабочее давление – 8 бар

★I watt hanno valori provvisori in attesa di certificazione. ★The watt values are not definitive awaiting for certification.

★Le nombre de Watts est une valeur indiquée à titre provisoire dans l'attente de la certification. ★Die Wattwerte sind vorläufig bis zur Zertifizierung.

★Los Vatos tienen valores provisionales en espera de la certificación. ★До получения сертификата приводится предварительное значение мощности в ваттах.

		
cod. C409CR	cod. 10102034CR	cod. 101095CR
p./S. 402	p./S. 403	p./S. 409

■ Raccordi disponibili - Fittings available - Raccords disponibles - Klemmverschraubungen
verfügbar - Racores disponibles - Фитинги доступны к заказу
p./S. 408



Disponibilità valvole colorate . Coloured valves available . Vannes colorées
disponibles . Farbige Ventile verfügbar . Disponibilidad de válvulas de colores .
Возможны окрашенные клапана
p./S.431